



# Armada AR20P Premium 20K Brake Lining



## TYPICAL PHYSICAL PROPERTIES

|                   |      |
|-------------------|------|
| Gogan Hardness    | 24   |
| Specific Gravity  | 1.88 |
| Flexural Strength | 5900 |

## TYPICAL FRICTION PROPERTIES

|                    |       |
|--------------------|-------|
| Normal Friction    | 0.410 |
| Hot Friction       | 0.393 |
| 400° Wear Friction | 0.425 |
| CoF                | FF    |

## Armada AR20P Performance Profile

- Certified by third party dynamometer testing to meet the torque ranges detailed in TMC's PR628 standard for FMVSS TP-121D Reduced Stopping Distances (RSD)
- Consistent Performance
- Superior Stopping Power
- Quiet Operation
- Exceptional Lining and Drum Life
- Improved Cost Per Mile
- Manufactured in ISO/TS 16949 Certified Facilities
- Asbestos Free







Exclusively By  
**TruckPro**

Shop heavy-duty truck & trailer parts 24/7 at [TruckPro.com](http://TruckPro.com)



# Armada AR20P Premium 20K Brake Lining

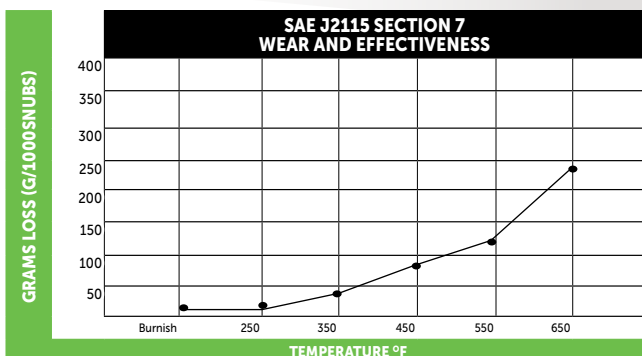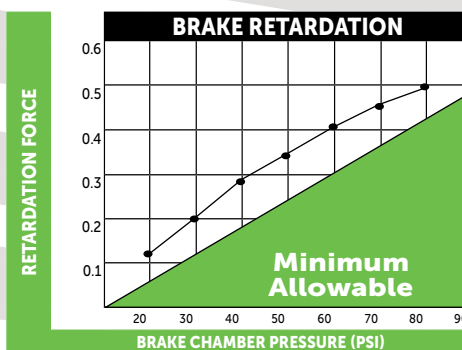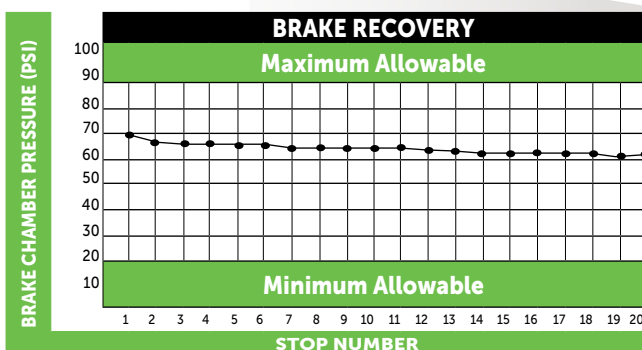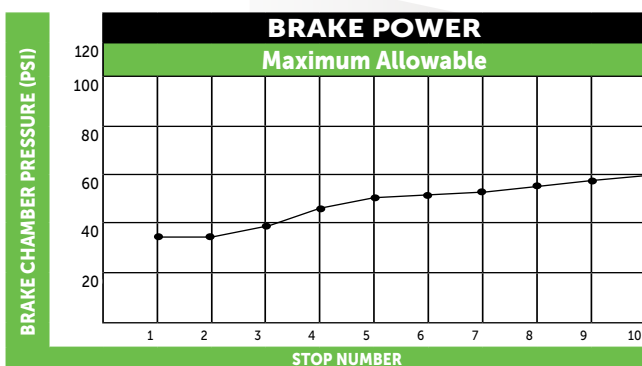

## DYNAMOMETER TEST PARAMETERS

|                |                |
|----------------|----------------|
| Axle Rating    | 23,000 lbs.    |
| Brake Size     | 16.5 X 7 in.   |
| AL Factor      | 165 (30 x 5.5) |
| Rolling Radius | 19.6 in.       |



Exclusively By  
**TruckPro**

Shop heavy-duty truck & trailer parts 24/7 at [TruckPro.com](http://TruckPro.com)